


## AIR PUMPS


Sykes Pumps range of air operated double diaphragm pumps, are available with a combination of aluminium, cast iron, or stainless steel wetted parts and centre sections with a choice of elastomer option materials.

Options are also available for the specific transfer of aggressive liquids, or the hygienic handling of food substances.

Pump size range between 25mm to 75mm.

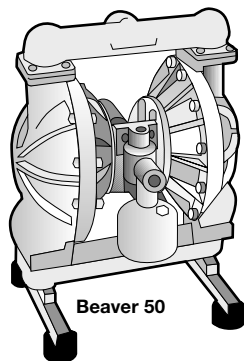


Beaver 50

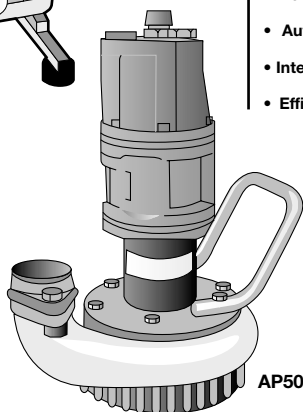

AP50

- Leak free pumping
  - Zero air leakage when pump is stalled
  - Self priming to over 6 metres
  - Dry running with no damage
  - Discharge can be shut off with no damage
  - Temperature limits up to 100°C
  - Safe in hazardous areas
- We also offer the AP50 air powered pump submersible centrifugal pump featuring:
- Compact vertical configuration
  - Totally submersible
  - Automatic over speed control
  - Integral oil reservoir
  - Efficient air motor

## AIR PUMPS

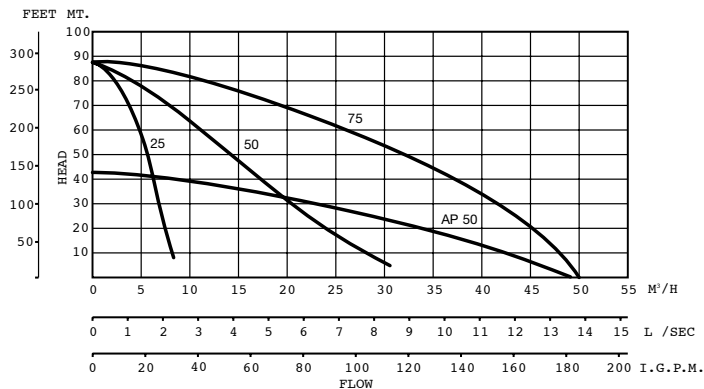

Model	Suction & discharge size	Max air inlet pressure (psi)	Max air consumption (cfm)	Max solids diameter (mm)	Length (mm)	Width (mm)	Height (mm)	Weight (kg) (Aluminium)
Beaver 25	1" B.S.P	125	35	3	330	226	420	16.3
Beaver 50	2" B.S.P	125	140	6	453	352	571	41.0
Beaver 75	3" B.S.P	125	160	10	575	460	746	83.7
AP50	2" B.S.P	100	95	N/A	300	300	460	32.0